



Lineal4



Enlazable



Rendimiento de 160 lm/W

Triac ☒ 1-10V ☒ DALI ☒ 50.000 h Garantía **5 años** CCT ●.60 ○.50 ●.40 ●.30 ●.27 💧 IP20

Modelo	W	CCT			Color			Apertura				Dimensiones (L x A x H)
		○ .50	● .40	● .30	○ .1	● .2	● .3	.25	.60	.90	.120	
LINEAL4	30	4.800 lm	4.650 lm	4.500 lm	○	●	●					.1 1.200 x 81 x 73 mm
	35	5.600 lm	5.425 lm	5.250 lm	○	●	●					.1 1.500 x 81 x 73 mm
	40	6.000 lm	6.200 lm	6.000 lm	○	●	●					.1 1.200 x 81 x 73 mm
	50	8.000 lm	7.750 lm	7.500 lm	○	●	●					.1 1.500 x 81 x 73 mm
	60	9.600 lm	9.300 lm	9.000 lm	○	●	●					.1 1.200 x 81 x 73 mm
	70	11.200 lm	10.850 lm	10.500 lm	○	●	●					.1 1.500 x 81 x 73 mm
35/40/45/50 seleccionable - - -												


▶ LED: **EVERLIGHT**®

▶ DRIVER:





Lineal4

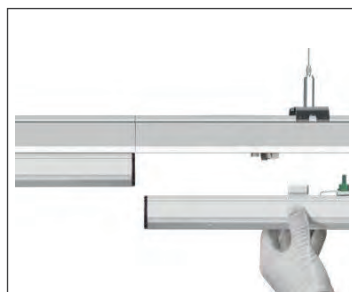

Tres encendidos independientes



Sistema Dimming y Multi-sensor



Conectores L,T y X



Carril trifásico universal



Instalación en superficie o
suspendida



Sistema de Emergencia
Integrado (Opcional)



